

Cassette Type



Selectable Remote Controller

* Customer needs to choose either wired or wireless.



Wired Remote Controller




Wireless Remote Controller

Fast, Flexible Installation

• 750 mm Drain-Up Mechanism

Drain hose can be elevated 750 mm from the base of the unit simply by connecting an elbow. This adds to ease of drain piping work, and flexibility in locating the indoor unit.

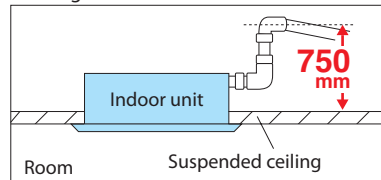

Easy Maintenance and Cleaning

• Anti-Mould Long-Life Air Filter



* For optimum comfort, we recommend cleaning the air filter every 1.5 months.

Versatile Functions


• 950 mm Square Panel for All Models for All Models (Optional: CZ-BT03P)



- Weekly Timer (Wired Remote Controller only)
- 24-Hour On/Off Real Setting Timer
- Odour Wash
- Economy Mode
- Auto Restart Function
- Auto Changeover Function
- Auto Fan Mode
- Dry Mode Function
- Low Ambient Cooling Operation
- *See page 14 for details.
- Hot Start Control
- Self-Diagnostic Function
- Optional: SUPER alleru-buster filter (CZ-SA11P)

Three Airflow Patterns for Extra Comfort

• Multi-Comfort Air Control

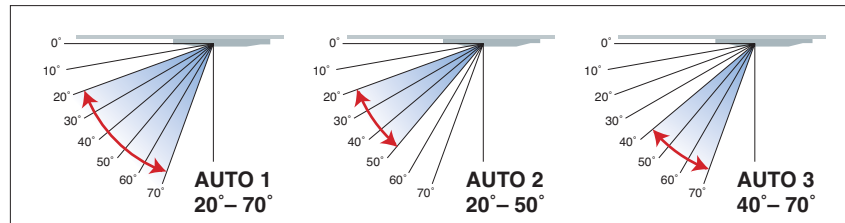

Specifications

Inverter Models



Items	Cooling Capacity	Heating Capacity	Power Source	Power Input	EER COP	Air Volume	Noise Level*				Dimensions			Net Weight			Piping Connection		Pipe Length		
							Sound Pressure Level		Sound Power Level		Indoor	Panel	Outdoor	Indoor	Panel	Outdoor	Gas Side	Liquid Side	Max. Length†	Max. Height	Max. Chargeless Length
							Indoor (Hi/Low)	Outdoor (Hi) Cooling Heating	Indoor (Hi) Cooling Heating	Outdoor (Hi) Cooling Heating											
							kW Btu/h	kW Btu/h	Phase V Hz	kW	W/W	L/s	dB(A)	dB(A)	dB	dB	mm (H/W/D)	mm (H/W/D)	mm (H/W/D)	kg	kg
CS-F18DB4E5 x2 CZ-BT03P x2 CU-L34DBE5	10.00 (4.00-12.00) 34,100 (13,600-40,900)	11.20 (4.00-14.00) 38,200 (13,600-47,700)	1φ 220-240 50	2.59 (1.15-3.20) 2.90 (1.10-4.10)	3.86 3.86	267 x2 267 x2	35/32	52 54	50 50	66 68	246 840 840	950 950 45	1,340 900 320	26	4.5	110	12.7 x 2 (1/2 x 2) 15.88 (5/8)	6.35 x 2 (1/4 x 2) 9.53 (3/8)	50	30	30
CS-F24DB4E5 CZ-BT03P CU-L24DBE5	6.30 (2.10-7.10) 21,500 (7,200-24,200)	7.10 (2.20-8.00) 24,200 (7,500-27,300)	1φ 220-240 50	1.70 (0.50-2.20) 1.84 (0.50-3.10)	3.71 3.86	300 300	36/32	47 49	51 51	63 65	246 840 840	950 950 45	795 900 320	26	4.5	71	15.88 (5/8)	9.53 (3/8)	50	30	30
CS-F28DB4E5 CZ-BT03P CU-L28DBE5	7.10 (2.20-8.00) 24,200 (7,500-27,300)	8.00 (2.30-8.50) 27,300 (7,800-29,000)	1φ 220-240 50	2.00 (0.60-2.40) 2.11 (0.60-3.20)	3.55 3.79	333 333	38/33	48 50	53 53	64 66	246 840 840	950 950 45	795 900 320	26	4.5	71	15.88 (5/8)	9.53 (3/8)	50	30	30
CS-F34DB4E5 CZ-BT03P CU-L34DBE5	10.00 (4.00-12.00) 34,100 (13,600-40,900)	11.20 (4.00-14.00) 38,200 (13,600-47,700)	1φ 220-240 50	2.59 (1.15-3.20) 2.90 (1.10-4.10)	3.86 3.86	450 450	42/37	52 54	57 57	66 68	288 840 840	950 950 45	1,340 900 320	28.5	4.5	110	15.88 (5/8)	9.53 (3/8)	50	30	30
CS-F43DB4E5 CZ-BT03P CU-L43DBE5	12.50 (4.00-14.00) 42,600 (13,600-47,700)	14.00 (4.00-16.00) 47,700 (13,600-54,600)	1φ 220-240 50	3.64 (1.20-3.80) 3.88 (1.15-4.90)	3.43 3.61	517 517	46/41	53 55	61 61	67 69	288 840 840	950 950 45	1,340 900 320	28.5	4.5	110	15.88 (5/8)	9.53 (3/8)	50	30	30
CS-F50DB4E5 CZ-BT03P CU-L50DBE5	14.00 (4.00-16.00) 47,700 (13,600-54,600)	16.00 (4.00-18.00) 54,600 (13,600-61,400)	1φ 220-240 50	4.65 (1.20-4.95) 4.75 (1.15-5.9)	3.01 3.73	517 517	47/42	55 57	62 62	69 71	288 840 840	950 950 45	1,340 900 320	28.5	4.5	110	15.88 (5/8)	9.53 (3/8)	50	30	30
CS-F50DB4E5 CZ-BT03P CU-L50DBE8	14.00 (4.00-16.00) 47,700 (13,600-54,600)	16.00 (4.00-18.00) 54,600 (13,600-61,400)	3φ 380-415 50	4.65 (1.20-4.95) 4.69 (1.15-5.90)	3.01 3.41	533 533	47/42	54 56	62 62	68 70	288 840 840	950 950 45	1,340 900 320	28.5	4.5	105	15.88 (5/8)	9.53 (3/8)	50	30	30

* The Sound Pressure Level of the outdoor unit shows the value measured of a position 1 metre in front of the main body and 1.5 meters from the ground.

** Additional gas might be required.

*** Indoor Unit

Rating Conditions

	Cooling	Heating
Inside air temperature	27°C DB/19°C WB	20°C DB
Outside air temperature	35°C DB/24°C WB	7°C DB/6°C WB